


KDS-3

(+) Hazard Signal Fixer

OVERVIEW

The KDS-3 was designed to be used with VISION 1460 & SCIBORG 640H series car security systems, when installed on vehicles like Mitsubishi where Hazard lamps flash 2 times on LOCK but only 1 time on UNLOCK, and where door locking by the Factory Key doesn't Arm or Disarm the car security system.

Wiring Diagram

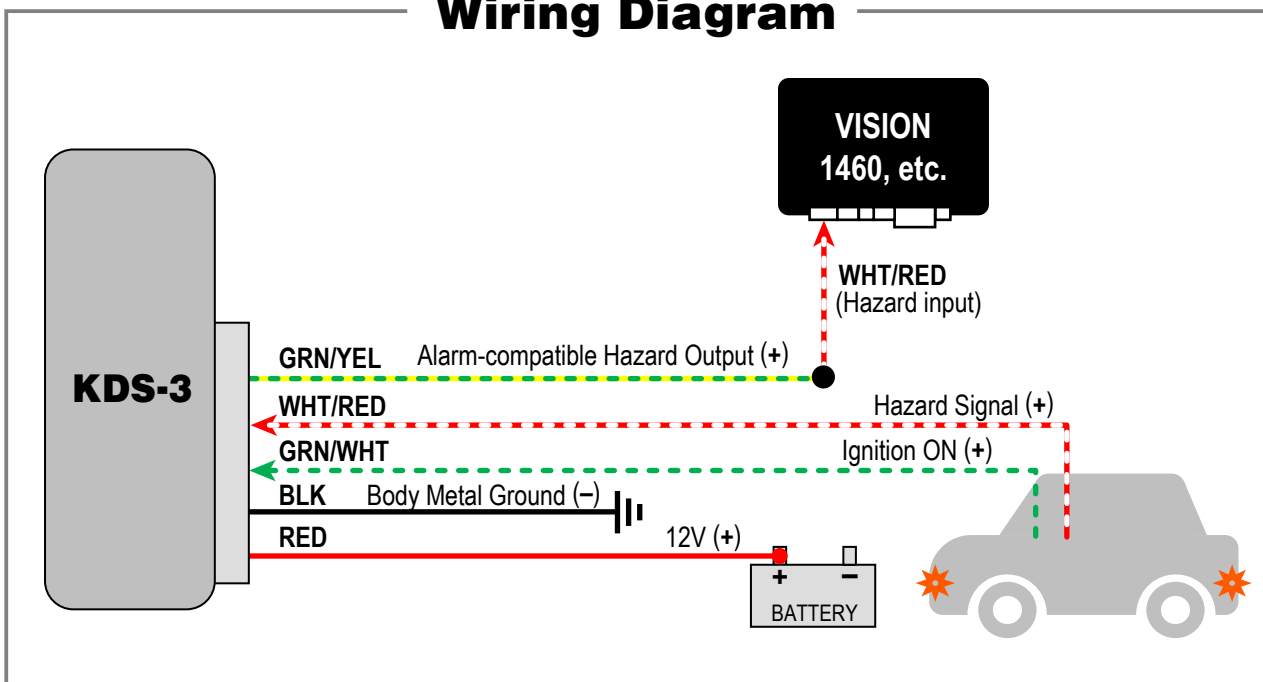

OPERATION & NOTES

- Reads the non-standard Hazard Lamp signals and outputs car alarm compatible signals.
- For each Hazard signal read, the KDS-3 will output two 330ms signals, separated by 100ms.
- Connecting the Ignition input wire is not required, but if you do connect it, the KDS-3 will not output any signals at all while the Ignition is ON (i.e., while the engine is running). Connecting it is recommended.